


Step 1

Stripping walls



Step 2

wall humidification




Step 3

preparation of the coating



Step 4 Application

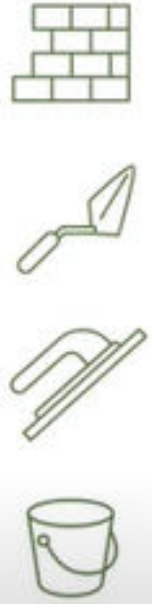

Step 5

Finish



troweled scraped

troweled sponge

Lycée Alphonse Benoît - Île sur la Sorgues (84)

France

- ***Coating : 5000m²***
- ***Products :***
 - *Tradilys Protect : 1250m² (2-3cm)*
 - *CENT % undercoat and finish coat : 3750m² (3cm)*
 - *Restone Premium : Stone repairs*



Samples for the architecte



Before the work



Treatment of basement walls with dehumidifying coating. To limit humidity in the upper side of the wall

